

# □ 20 cooling fan

×20×07mm





## General Specifications

- Motor : 6 Poles brushless DC motor
- Frame & Impeller: Plastic (UL 94V-0)
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

## Major Characteristic Parameters

品牌	轴承	电压	启动电压	电流	功率	转速	风量	静压	噪音		
型号	B/S	V	V	A	W	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dba
SP20S05L-07DL	S	5	4.5~5.5	0.07	0.35	7000	0.01	0.35	1.1	0.04	22.3
SP20S12L-07DL	S	12	7.0~13.2	0.06	0.72	7000	0.01	0.35	1.1	0.04	22.3
SP20S05M-07DL	S	5	4.5~5.5	0.09	0.45	10000	0.02	0.71	1.9	0.07	29.0
SP20S12M-07DL	S	12	7.0~13.2	0.08	0.96	10000	0.02	0.71	1.9	0.07	29.0
SP20S05H-07DL	S	5	4.5~5.5	0.11	0.55	13000	0.03	1.06	3.2	0.12	32.0
SP20S12H-07DL	S	12	7.0~13.2	0.09	1.08	13000	0.03	1.06	3.2	0.12	32.0

\*Bearing system B: Two Ball Bearing S: Sleeve Bearing

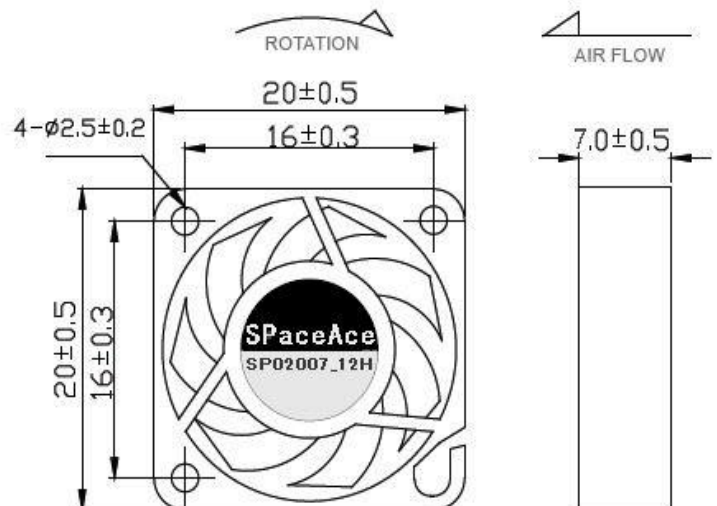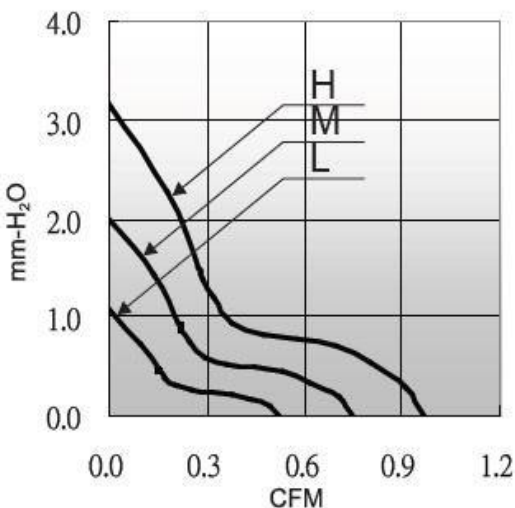

unit:mm