

60 DC Blower

×60×25mm





General Specifications

- Motor : 6 Poles brushless DC motor
- Frame & Impeller: Plastic (UL 94V-0)
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

Major Characteristic Parameters

| 品牌 | 轴承 | 电压 | 启动电压 | 电流 | 功率 | 转速 | 风量 | 静压 | 噪音 | | |
|---------------|-------|----|----------|------|------|------|--------|------|--------|--------|------|
| 型号 | B/S | V | V | A | W | RPM | m3/min | CFM | mm-H2O | In-H2O | dba |
| SP60B05L-25DL | B / S | 5 | 4.5~5.5 | 0.36 | 1.80 | 3200 | 0.19 | 6.71 | 10.86 | 0.43 | 34.0 |
| SP60B12L-25DL | B / S | 12 | 7.0~13.2 | 0.18 | 2.16 | 3200 | 0.19 | 6.71 | 10.86 | 0.43 | 34.0 |
| SP60B05M-25DL | B / S | 5 | 4.5~5.5 | 0.48 | 2.40 | 3700 | 0.22 | 7.88 | 15.49 | 0.61 | 39.0 |
| SP60B12M-25DL | B / S | 12 | 7.0~13.2 | 0.24 | 2.88 | 3700 | 0.22 | 7.88 | 15.49 | 0.61 | 39.0 |

*Bearing system B: Two Ball Bearing S: Sleeve Bearing

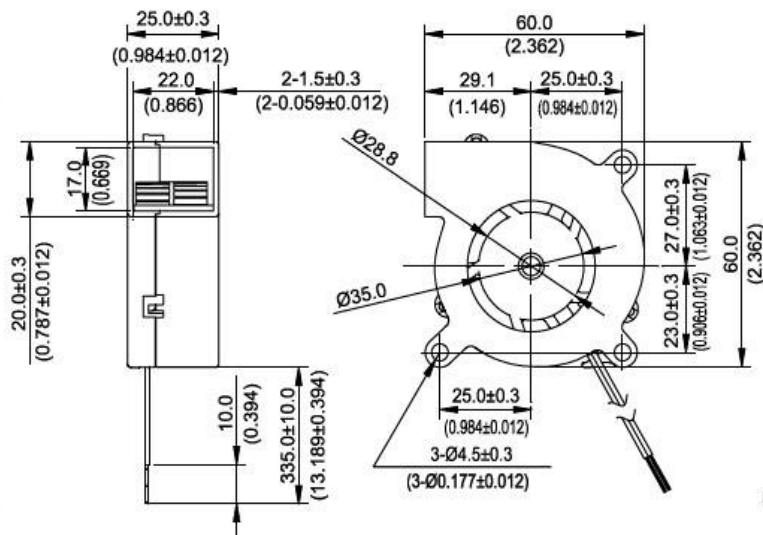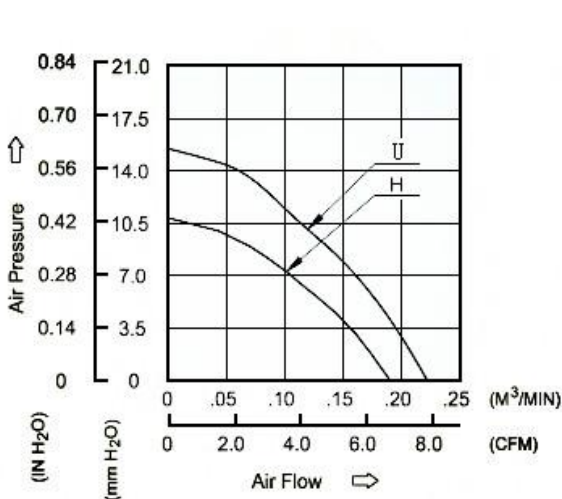

UNIT: mm (INCH)