

75 DC Blower

× 75 × 25mm





General Specifications

- Motor : 6 Poles brushless DC motor
- Frame & Impeller: Plastic (UL 94V-0)
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

Major Characteristic Parameters

品牌	轴承	电压	启动电压	电流	功率	转速	风量		静压		噪音
型号	B/S	V	V	A	W	RPM	m3/min	CFM	mm-H2O	In-H2O	dba
SP75B05L-25DL	B / S	5	4.5~5.5	0.20	1.00	2800	0.26	9.26	7.26	0.29	39.0
SP75B12L-25DL	B / S	12	7.0~13.2	0.10	1.20	2800	0.26	9.26	7.26	0.29	39.0
SP75B05M-25DL	B / S	5	4.5~5.5	0.32	1.60	3400	0.32	11.31	12.14	0.48	43.0
SP75B12M-25DL	B / S	12	7.0~13.2	0.16	1.92	3400	0.32	11.31	12.14	0.48	43.0
SP75B12H-25DL	B / S	12	7.0~13.2	0.27	3.24	4000	0.39	13.84	19.64	0.77	48.0
SP75B12U-25DL	B / S	12	7.0~13.2	0.34	4.08	4400	0.43	15.33	24.82	0.98	51.0

*Bearing system B: Two Ball Bearing S: Sleeve Bearing

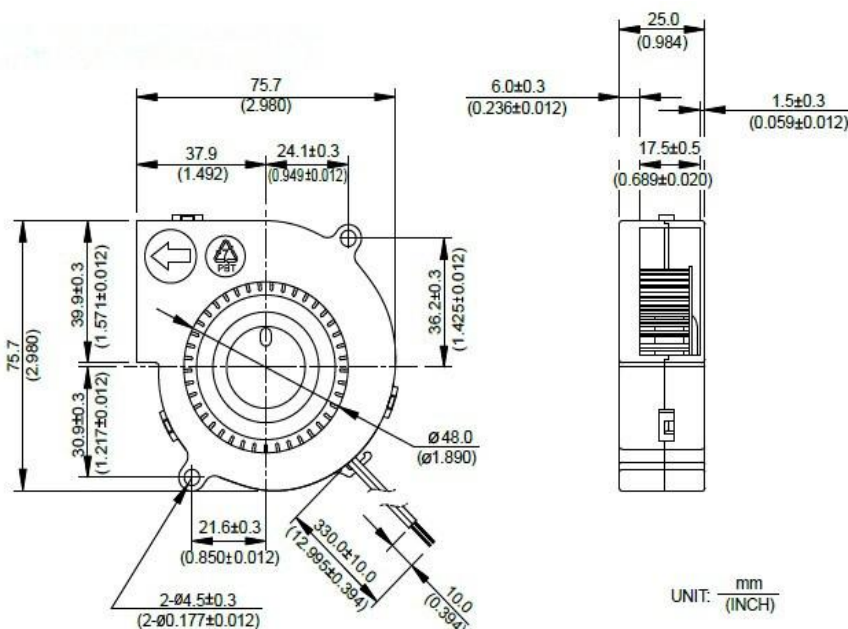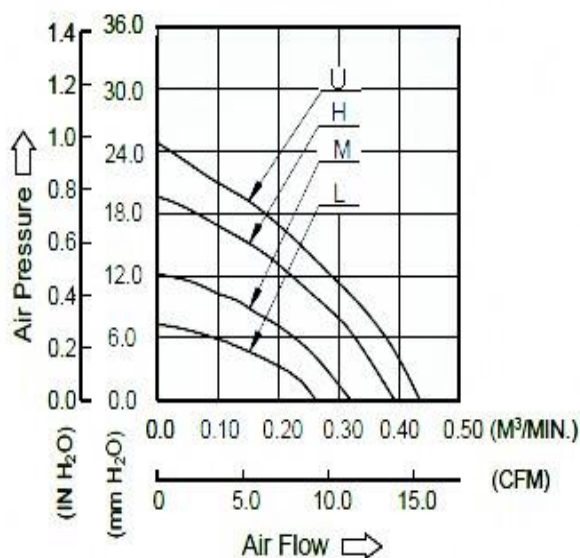

UNIT: mm
(INCH)